


# KD8172

17" Monitor Keyboard Drawer  
1280 x 1024 Industrial LCD  
104 key keyboard with touchpad

Rack Consoles

## Installation Guide


# Structure Diagram

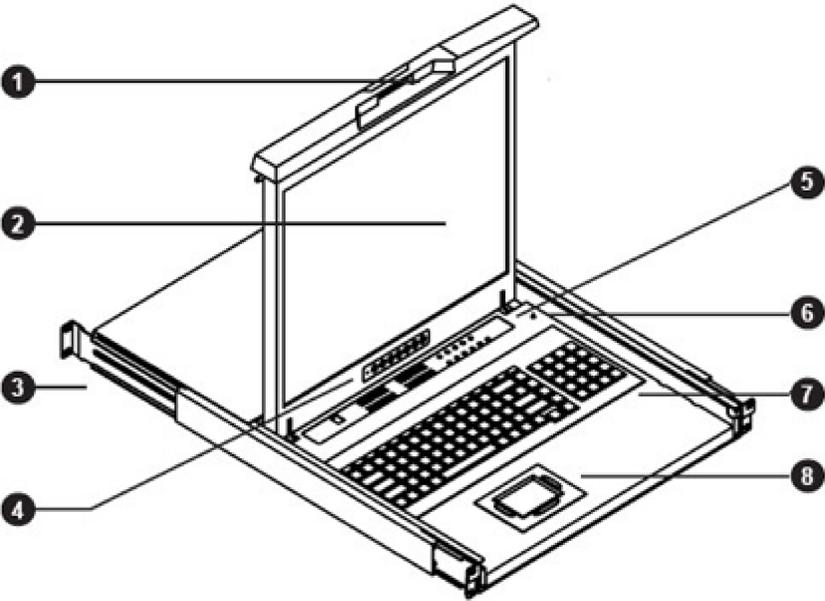

- 1. Carry handle to release the 2-pt lock
- 2. LCD interchangeable module kit
- 3. "One Man" Installation Slides
- 4. LCD membrane


- 5. Membrane switch (KVM option)
- 6. Micro switch for screen auto power off
- 7. Keyboard interchangeable module kit
- 8. Mouse interchangeable module kit

## How to Install "One Man" Installation Slides into rack

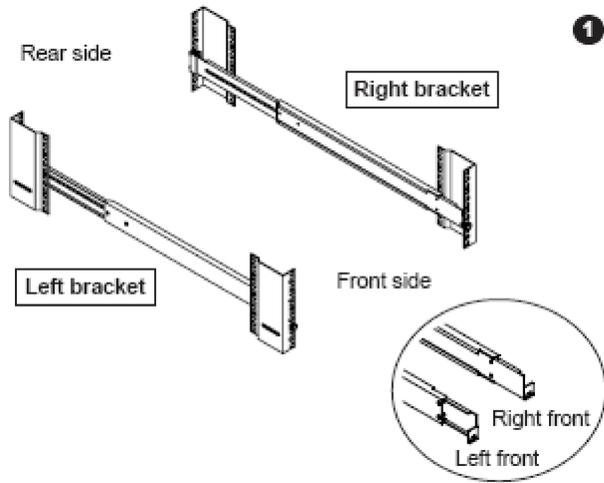


- » Attach the left and right mounting bracket to rack 19" mounting rails.
- » Adjust the rear mounting bracket to fit your rack.
- » M6 screw and cup washer x 6 piece included.

**Caution :**  
Leaving the screws slightly loose, until you complete the installation in step 4

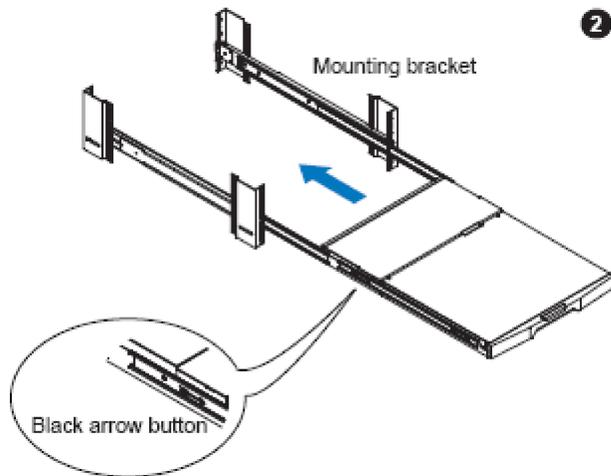


- » Pick up the LCD keyboard drawer.
- » Insert the LCD keyboard drawer into the mounting bracket.
- » Pull and hold the left & right black arrow buttons on the rails.
- » Return the LCD keyboard drawer to park position

## How to Install "One Man" Installation Slides

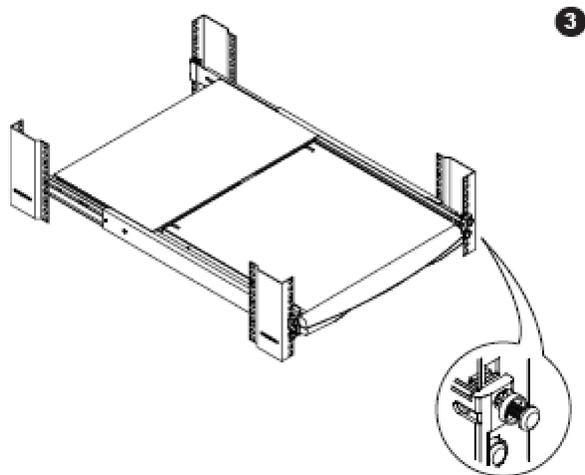

»Attach front left and right mounting ears of the LCD keyboard drawer to vertical mounting rails.

»M6 screw and cup washer x 2 pcs included.

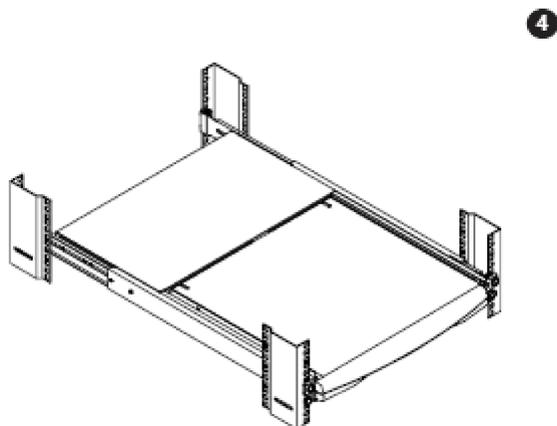

### **Complete the installation**

»Tighten all 8 piece of M6 screw to complete the installation

## How to Use the Slides


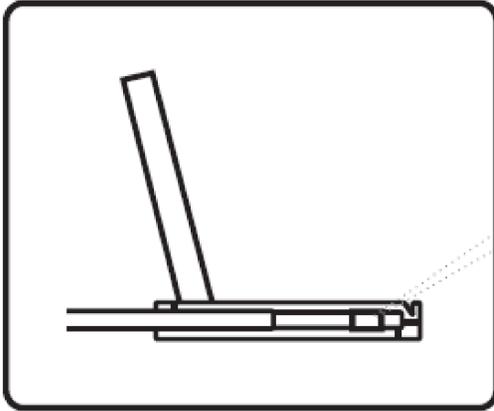


Figure 1



- » A black arrow release button is located on the outside of the LCD keyboard drawer. (shown in **Figure 1**)

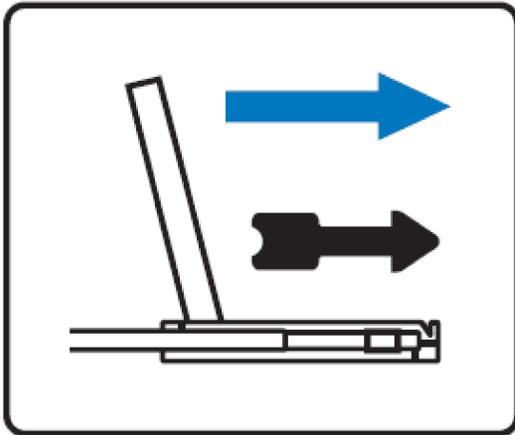


Figure 2

- » Pull and hold the black arrow button on either side of the LCD keyboard drawer to unlock. (shown in **Figure 2**)


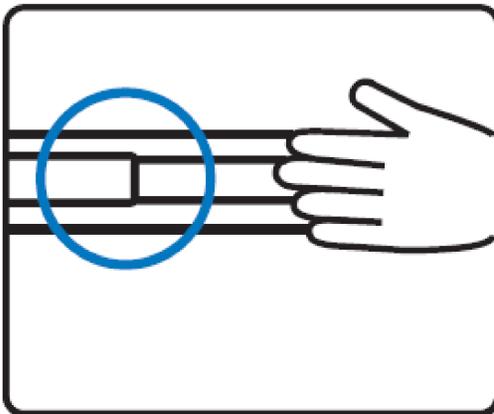


Figure 3

- » Push the LCD keyboard drawer into the rack. (shown in **Figure 3**).

**Caution:** Keep your fingers away from the slide stop

Connect to server via USB interface

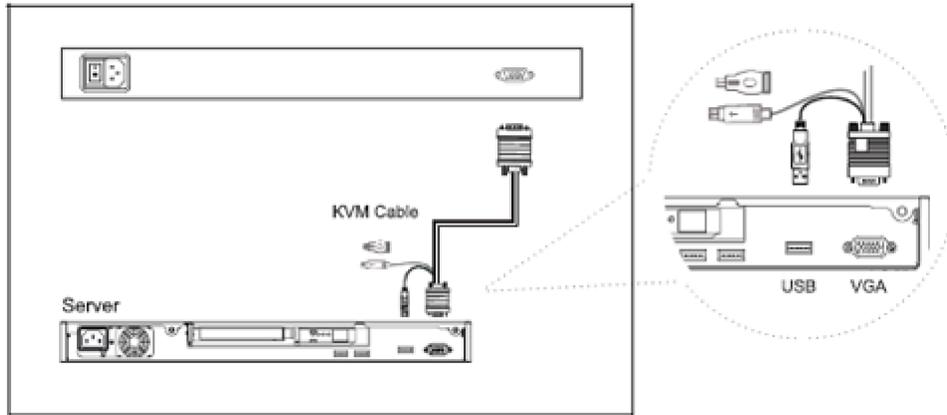

Connect to server via PS/2 interface

